


MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS MONTAGEANLEITUNG · INSTRUCTIONS DE MONTAGE

Saab 900 M94-, Saab 9000, Saab 9-3, Saab 9-5

Cooler/heater box

Accessories Part No.	Group	Date	Instruction Part No.	Replaces
12 799 129 400 112 272	9:38-01	Jun 02	12 800 289 (86 91 172)	86 91 172 Jun 00

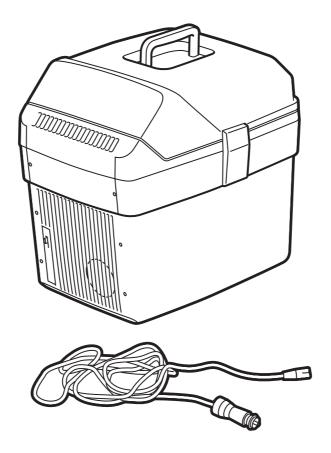

E930A083

One end of the cable is connected to a 12 V socket in the car and the other is connected to the cooler box.

Note

The cable can only be connected to the cooler box in a specified manner.

The selector switch on the side of the box has three operating modes: Cool, Off, Heat.

The box will only operate as long as air circulates through the box intake and exhaust. Always place the box in a well-ventilated space and out of direct sunlight. Never cover the box.

Cooling

Move the switch on the side of the box upwards to engage cooling mode. For best results, place previously chilled items in the box. The items are then cooled and will remain cool as long as the cooling mode is selected and the green lamp is on.

Heating

Move the switch on the side of the box downwards to engage heating mode. For best results, place previously heated items in the box. The items are then warmed and will remain warm as long as the heating mode is selected and the red lamp is on. Items remain warm for at least one hour after disconnecting heating mode provided the lid is not opened.

Care

Clean the inside and outside of the box with a damp cloth and washing-up liquid. Leave the lid slightly open if the box will not to be used for longer periods of time.

Fault diagnosis


If the box is not operating properly, check the following:


- 1 Power supply from the car electrical socket to the box.
- 2 The outer and inner fan blades (in order to check if the fan blade is moving, cover the photo cell inside the lid).


If the fault remains, contact the retailer.


Specifications

Output:	48 W (4 A at 12 V)	
Capacity:	18 litres	
Weight:	4.8 kg (10.5 lbs.)	
Cooling effect at normal temperature 20-30° C:	5° C (41° F)	
Maximum heating level:	65° C (149° F) (fixed thermostat)	









900, 9000, 9-3, 9-5 4D

The cooler/heater box should be secured with mounting strap 400 111 951 (sold separately), see illustration.

MARNING


The box should always be securely strapped behind the rear seat. The rear seat backrest should be in an upright and locked position.


- 1 Place the box against the luggage compartment sill in approximate alignment with the car's longitudinal centre line.
- 2 Secure the strap around the box according to the illustration and tighten the strap.


Important


Make sure the strap does not come into contact with the electrical connection or the switch. Check that the luggage compartment pull does not come into contact with the box.

- 3 Make sure the box is stable.
- 4 Leave the installation instructions with the customer.









9-5 5D

The cooler/heater box should be secured with mounting strap 400 111 951 (sold separately), see illustration.

MARNING

The box should always be securely strapped behind the rear seat. The rear seat backrest should be in an upright and locked position.

- 1 Fit a load anchorage in the innermost position on the left-hand load rail. Place the box with the switch pointing towards the rear of the car against the anchorage and fit another anchorage directly behind the box.
- 2 Secure the strap around the box according to the illustration and tighten the strap.

Important

The strap should not come into contact with the electrical connection or the switch.

- 3 Make sure the box is stable.
- 4 Leave the installation instructions with the customer.