



**MONTERINGSANVISNING · INSTALLATION INSTRUCTIONS  
MONTAGEANLEITUNG · INSTRUCTIONS DE MONTAGE**



## Saab 9-3 (9440) 5D M06-

### Decor strip, tailgate


Accessories Part No.	Group	Date	Instruction Part No.	Replaces
12 766 204	9:84-34	Apr 05	32 025 669	

### To remove, tailgate trim


- 1 Open the tailgate.
- 2 Remove the upper window cover.

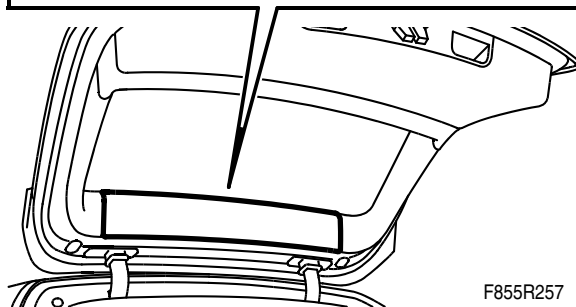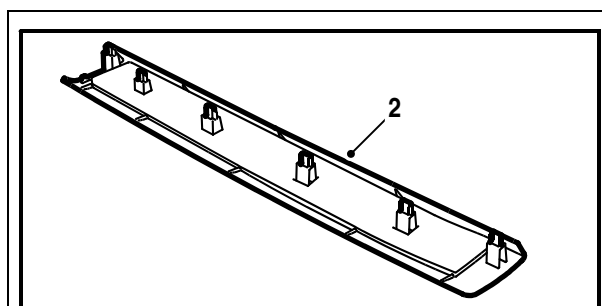

- 3 Remove the side covers.

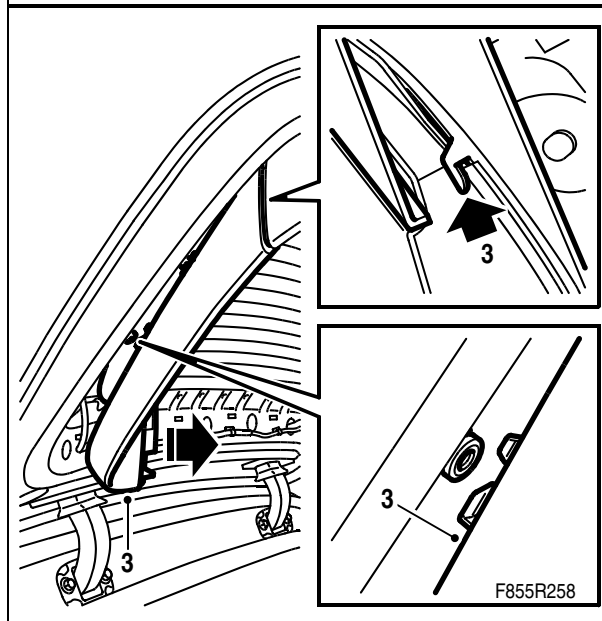


- 4 Remove the speaker grilles.
- 5 Remove the two-stage rivets using the 84 71 179 Removal tool, clips.
- 6 Remove the trim's screws.
- 7 Remove the trim by pulling it straight down.

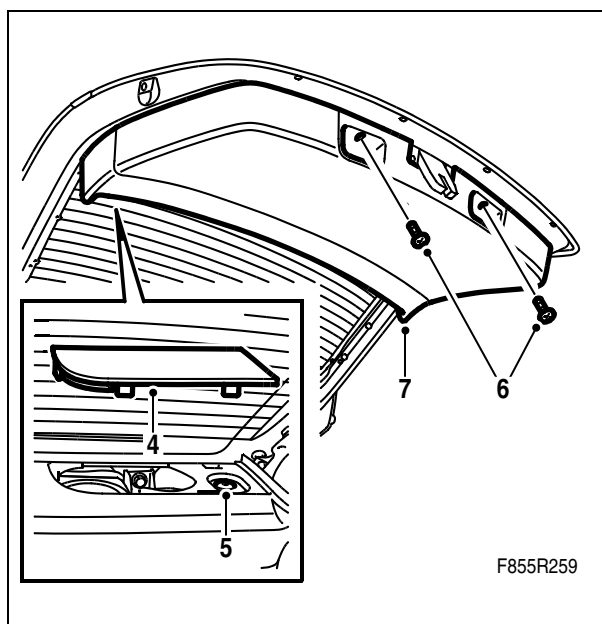


## To remove, existing decor strip

- 1 Remove the tailgate trim in accordance with the above.
- 2 Detach the loudspeakers' connectors. Remove the loudspeaker holders.

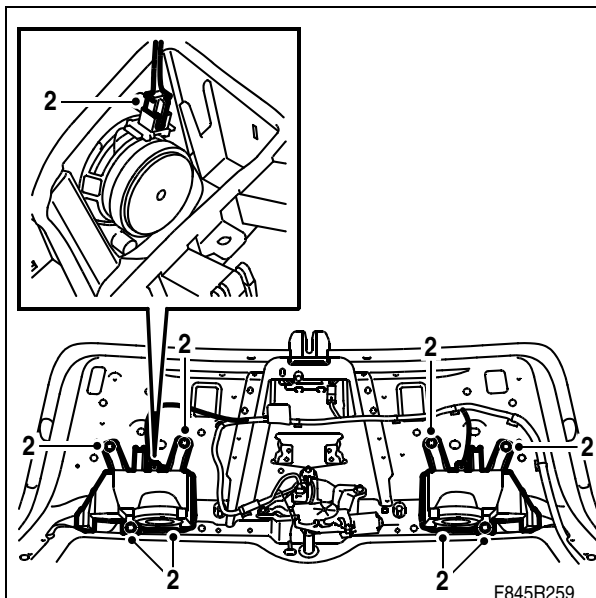


- 3 Remove the nuts holding the decor strip to the tailgate.
- 4 Detach the connector.
- 5 Close the tailgate. Have the remote control available in case the tailgate locks.
- 6 Pull out the decor strip.
- 7 Remove the nuts holding the handle to the decor strip and prize the handle off using the 83 93 474 Removal tool.
- 8 Transfer the studs and the clips.
- 9 Fit the handle to the decor strip.

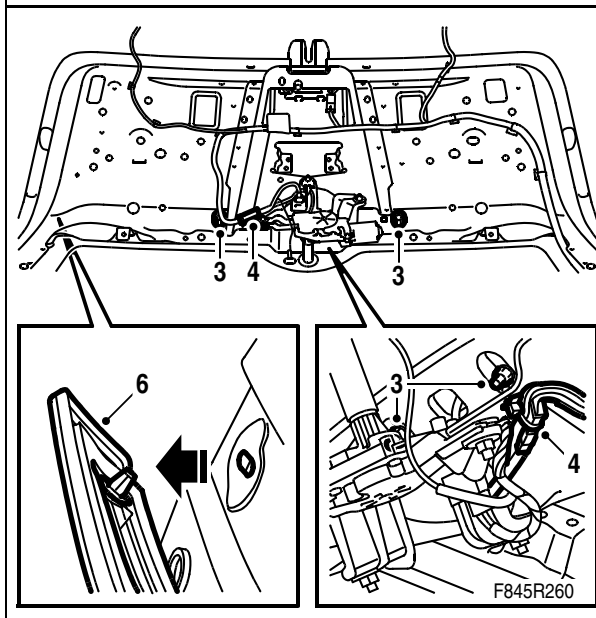


**To fit, new decor strip**

- 1 Insert the connector in the lead-in. Fit the decor strip in place.
- 2 Open the tailgate. Fit the nuts holding the decor strip.
- 3 Plug in the connector.

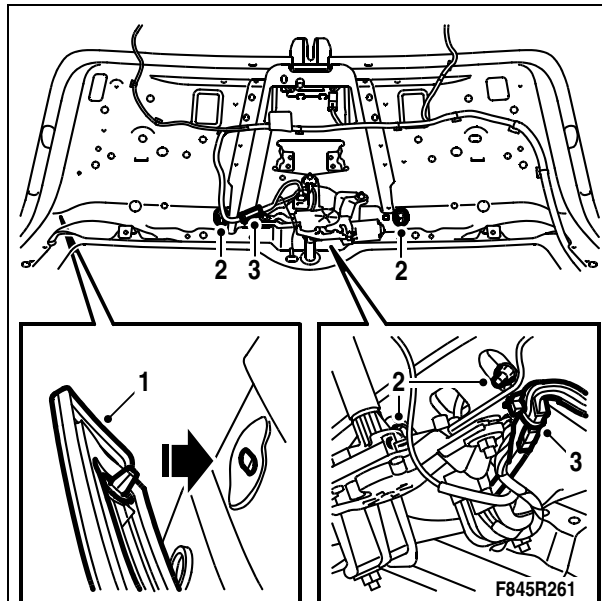


- 4 Fit the loudspeakers' holders and plug in the connector.
- 5 Fit the tailgate trim.
- 6 Fit a new emblem.
- 7 Check that the lock is working.

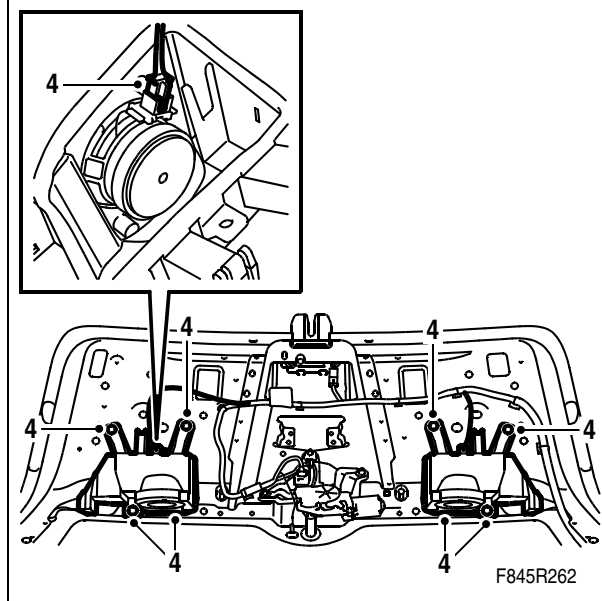


## To fit, tailgate trim


- 1 Fit the trim mountings to the tailgate.

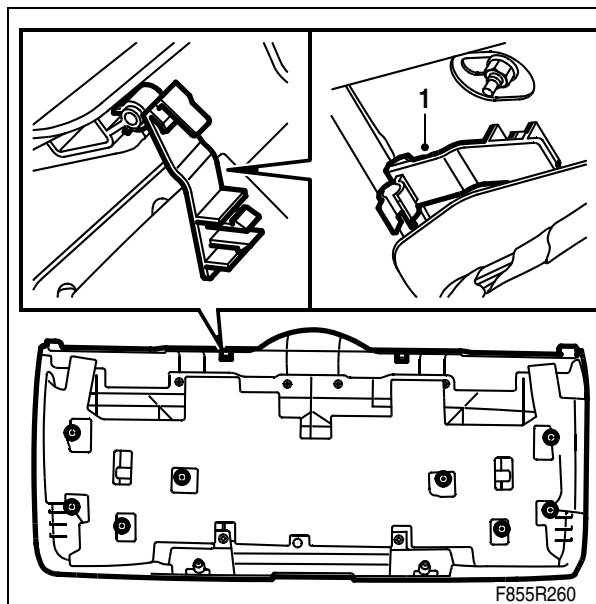

- 2 Fit the trim in place and press in the trim's clips.
- 3 Fit the trim's screws.
- 4 Fit the two-stage rivets.
- 5 Fit the speaker grilles.

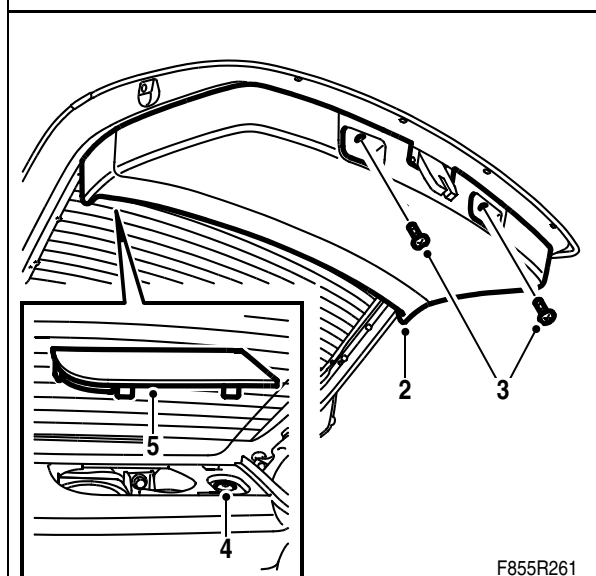

- 6 Fit the side covers.

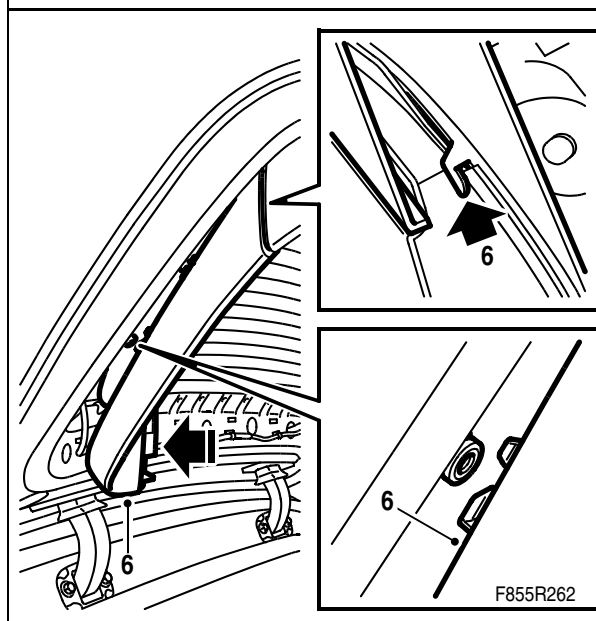

- 7 Fit the upper window cover.
- 8 Check the fit of the trim.

